

# PRODUCT OVERVIEW

# PRESSURE MEASUREMENT

MAC Sensor Co.,LTD.  
Changsha City,Hunan,China  
<http://www.macsensor.com>  
TEL: +86-731-89975636 / 89975645

## PA351 Sputtered Thin Film Metal Base Pressure Sensitive Chip



### Characteristics

- ☆ Sputtered film technology ensures good long-term stability and high reliability
- ☆ Wide working temperature range, low temp. drift, high overload capacity
- ☆ Integrated structure, suitable for a variety of fluid media
- ☆ 17-4PH stainless steel material with strong corrosion resistance
- ☆ Small size: outer diameter of strain surface is 7mm, height is 5mm, weight is 1g

### Applications

- ☆ Aerospace & ship
- ☆ Rail Transit
- ☆ Construction machinery
- ☆ Gasoline direct injection & diesel high pressure common rail direct injection
- ☆ Petroleum and Chemicals
- ☆ Gas and liquid pressure measurement in industrial automation control and other fields
- ☆ Pressure transmitters, pressure testing instruments

### Profiles



PA351 metal-based pressure-sensitive chip adopts MEMS technology, and the strain resistance is directly done on the 17-4 PH stainless steel substrate. Through the elastic deformation of the substrate, the chip outputs a mV voltage signal that is linearly related to the measured pressure, and realizes fast and accurate measurement.

This product is specially designed for OEM manufacturers and integrators who have high-standard requirements of sensor, high reliability and stability. The output of the chip is a mV voltage signal, and customers can process the signal according to their actual requirements.

## Specifications



Parameter	PA351
Measuring range(MPa)	0.5MPa~250MPa
Measuring medium	Gases, liquids compatible with stainless steel
Pressure type	Gauge pressure, absolute pressure
Accuracy	$\pm 0.03\%F.S$ , $\pm 0.05\%F.S$ , $\pm 0.1\%F.S$ , $\pm 0.2\%F.S$ , $\pm 0.5\%F.S$ , $\pm 1\%F.S$
Working temp.	-40~+105℃ or by customized
Long-term stability	$\pm 0.2\%F.S/year$
Nonlinear	$\pm 0.1\%F.S$ , $\pm 0.15\%F.S$ , $\pm 0.2\%F.S$ , $\pm 0.3\%F.S$ , $\pm 0.4\%F.S$ , $\pm 0.5\%F.S$ , $\pm 0.6\%F.S$
Hysteresis	$\pm 0.1\%F.S$
Repeatability	0.1%FS
Sensitivity	1.3 $\pm 0.10mV/V$ , 1.4 $\pm 0.25mV/V$ , 1.5 $\pm 0.10mV/V$ , 1.7 $\pm 0.20mV/V$
Burst pressure	1000%~4000%F.S (the max is $\leq 400MPa$ )
Allowable overload	150%~200%F.S or by customized
Zero point temp. drift	$\pm 0.01\%F.S/^{\circ}C$
Full range temp. drift	$\pm 0.03\%F.S/^{\circ}C$
Response time	$\leq 0.1ms$
High reliability	Resistant to 10 million shocks, can be continuously pressurized
Insulation resistance	$\geq 1000M\Omega/500VAC$
Material	17-4PH
Dimensions	Strain surface outer diameter is 7mm, Height is 5mm

## Circuit Principle and Pin Definition

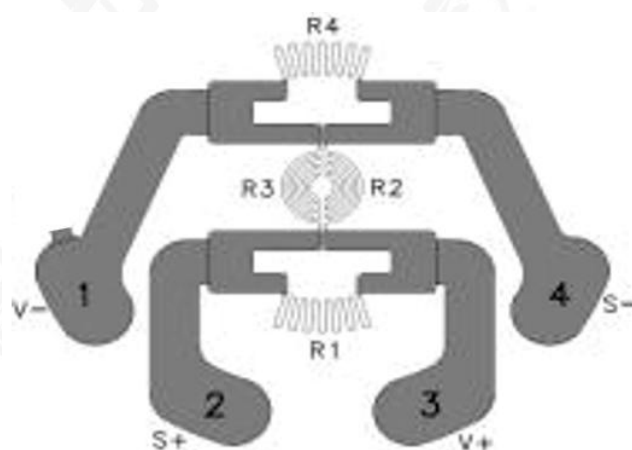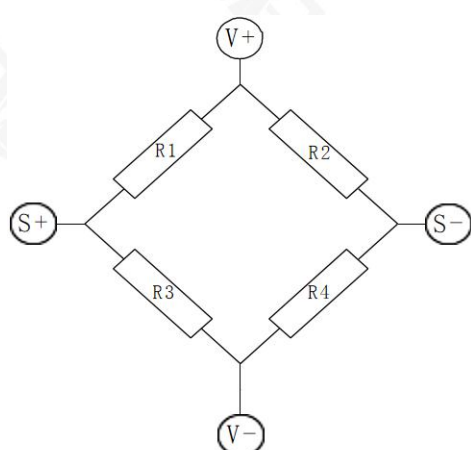

Pin No.	1	2	3	4
Function Code	V-	S+	V+	S-
Function Definition	Power -	Signal +	Power +	Signal -

## Dimensions and Wiring

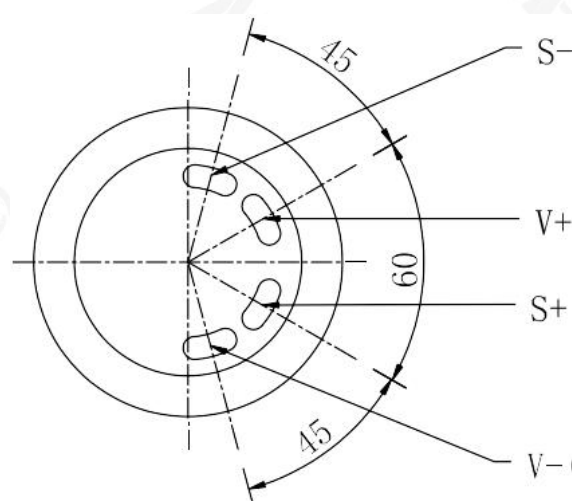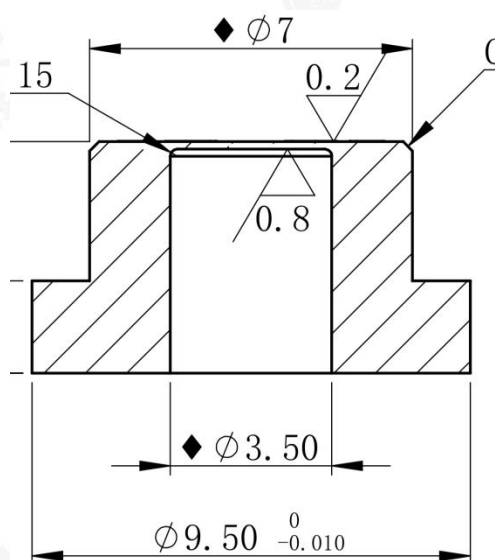

## Pressure Rating, Sensitivity and Pressure Resistance Range

Pressure (MPa)	Sensitivity (mV/V)	Nonlinearity ( $\pm\%$ F.S)	Overload pressure (rated pressure)	Burst pressure (rated pressure)
0.5	$1.4 \pm 0.25$	0.50	$\times 2$	$\times 30$
0.7	$1.4 \pm 0.25$	0.50	$\times 2$	$\times 3$
1.0	$1.3 \pm 0.10$	0.60	$\times 2$	$\times 40$
1.6	$1.5 \pm 0.10$	0.60	$\times 2$	$\times 40$
2.0	$1.7 \pm 0.20$	0.40	$\times 2$	$\times 40$
2.5	$1.7 \pm 0.20$	0.30	$\times 2$	$\times 40$
4	$1.7 \pm 0.20$	0.30	$\times 2$	$\times 20$
5	$1.7 \pm 0.20$	0.20	$\times 2$	$\times 20$
6	$1.7 \pm 0.20$	0.20	$\times 2$	$\times 20$
10	$1.7 \pm 0.20$	0.20	$\times 2$	$\times 20$
16	$1.7 \pm 0.20$	0.20	$\times 2$	$\times 10$
25	$1.7 \pm 0.20$	0.15	$\times 2$	$\times 10$
40	$1.7 \pm 0.20$	0.15	$\times 2$	$\times 10$
60	$1.7 \pm 0.20$	0.15	$\times 2$	$\leq 400\text{MPa}$
100	$1.5 \pm 0.10$	0.10	$\times 1.5$	$\leq 400\text{MPa}$
160	$1.5 \pm 0.10$	0.10	$\times 1.5$	$\leq 400\text{MPa}$
250	$1.5 \pm 0.10$	0.10	$\leq 300\text{MPa}$	$\leq 400\text{MPa}$

### Note

Other ranges can be customized.

## Order Information

Item	PA351 (Model)		D		066	11
Accuracy	A= 0.03%FS C= 0.1%FS E= 0.5%FS		B= 0.05%FS D= 0.2%FS F =1%FS			
Pressure Measurement	055= 0.5MPa		075= 0.7MPa		105= 1 MPa	
	165= 1.6MPa		205= 2 MPa		255= 2.5MPa	
	046= 4 MPa		056= 5 MPa		066= 6 MPa	
	106= 10 MPa		166= 16 MPa		256= 25 MPa	
	406= 40 MPa		506= 50 MPa		606= 60 MPa	
	706= 70 MPa		107= 100 MPa		167= 160 MPa	
	257= 250 MPa					
Temperature range	11= 0~85℃					
	22= -10~105℃					
	32= -25~105℃					
	42= -40~105℃					
	52= -55~105℃					